


02.41

INOX-thermometer with backflange

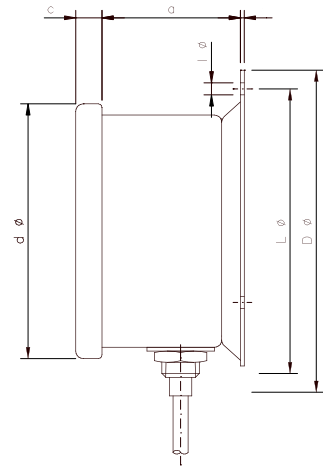

Type	a	b	c	d	D	I	L
1060 HBR/V	45	0,8	6	68	85	3,6	75
1080 HBR/V	45	0,8	6	85	110	3,6	95
1100 HBR/V	47	0,8	7	105	132	4,5	116

Case:	stainless steel IP 55
Mounting:	wallmounting with backflange
Window:	NG 60, 80 glas , NG 100 MAKROLON
Frontring:	stainless steel
Measuring system:	bourdon spring system double, with bi metal compensation
Scale:	white with black prints
Scale-length:	approx.270 <°
Graduation:	1°, 2°, 5°, 10° depending on range
Range:	from -80 ... +380°C available
Accuracy:	class 2 acc. to DIN 16203
Pointer:	black
Capillary connection:	bottom (radial) 06:00

Options:	- customers logo - coulored scale - class 1.0 ; class 1.5 - drag pointer - back adjustment - glycerin filling - back connection for capillary
----------	---